

◎ SPT050-100



Pictures are for reference only

Features

- ◎ Outer diameter: max. 100 mm
- ◎ Fast Ethernet (certified to 100-BaseT CAT5e & Cat6)
- ◎ Durable design for industrial environments


Typical Applications

- Machine Tool
- Packaging Machine
- Wind Turbine Pitch System

Data

Number of rings:	4/6/12/18 max. 24
circuits:	max. 16 A (P) / max. 3 A (S)
Voltage:	400VAC (P) / 240VAC/DC (S)
Dielectric strength:	500 VAC @ 50 Hz
Insulation resistance:	≥1000MΩ@500VDC
Rotation speed:	max. 120 rpm
Protection class:	IP 54
Temperature:	-20 °C~ +80 °C
Wire Length:	Rotor/Stator:1000 mm
Housing material:	Aluminium
Note:	"p" stands for power, "S" stands for signal.

Design Example

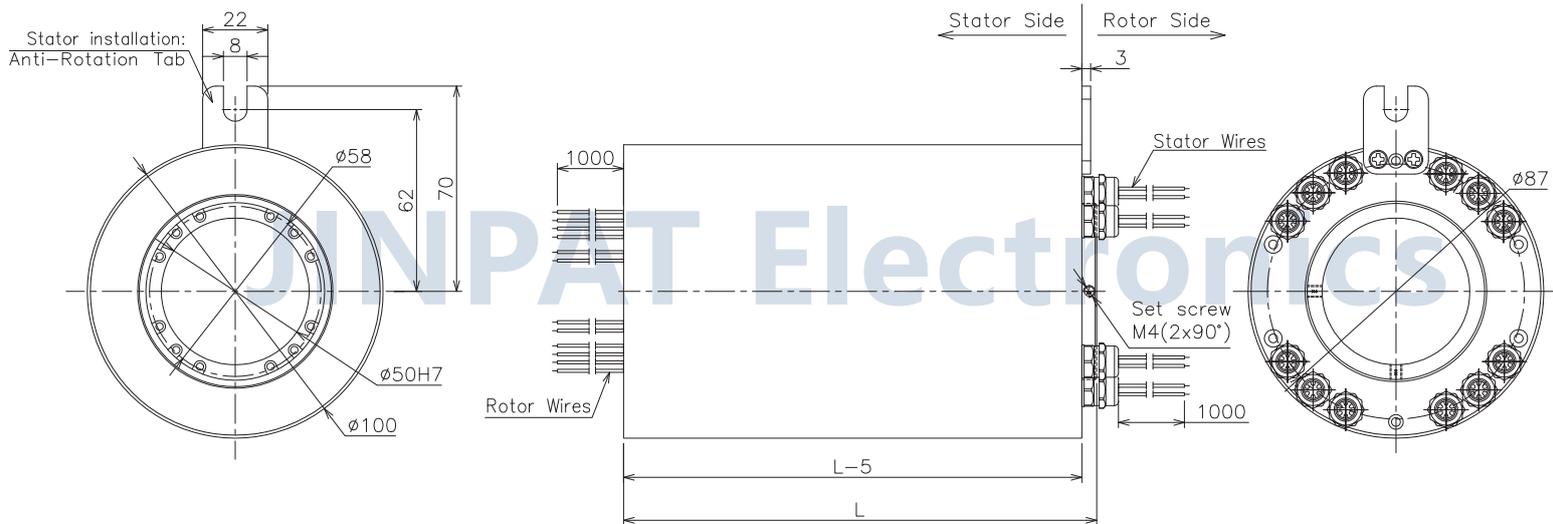

Number of rings	4	6	12	18	24
Power(L*)	84.8	119.8	159.8	/	/