

## ◎ SPT065-120



### Features

- ◎ Outer diameter: max. 120 mm
- ◎ Inner diameter: 30 mm ( up to 70 mm)
- ◎ Support fieldbus transmission
- ◎ Fast Ethernet (certified to 100-BaseT Cat.5e & Cat.6)
- ◎ Flexible interface configuration

### Typical Applications


- Machine Tool
- Packaging Machine
- Wind Turbine Pitch System

---

### Data

Number of rings:	Max. 12
Current per ring:	Max. 30 A
Voltage:	Max. 400 VAC
Dielectric strength:	2000VAC@50Hz
Insulation resistance:	≥500MΩ@500VDC
Rotation speed:	Max. 300 rpm
Protection class:	IP54 / IP65
Temperature:	-20 °C ~+70 °C
Electrical connection:	customized (flying leads, cable or connector)
Housing material:	Aluminium

## Design Example

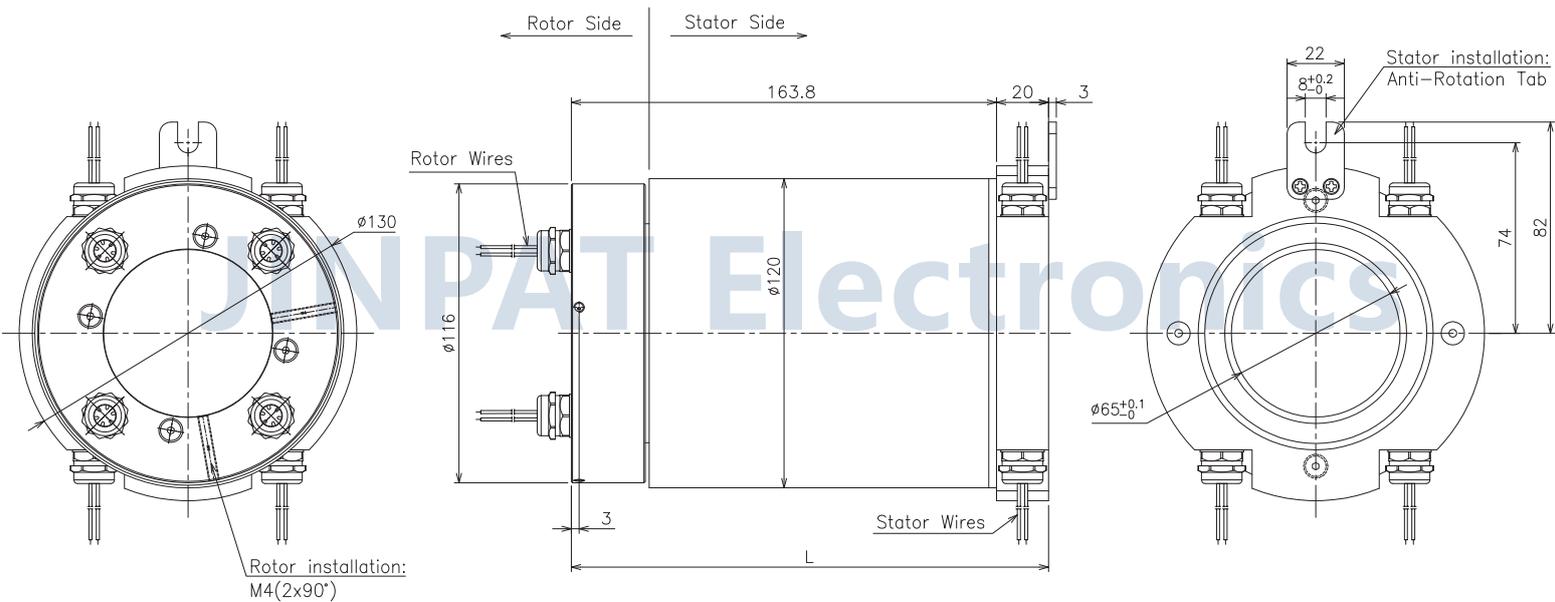

Number of rings	6	12
Power(L*)	138.8	182.8